


Specification Grade!


- Die-Cast Aluminum
- Extreme Durability
- Powdercoated Finish

Wave Lighting's Enduracast fixtures are constructed of sturdy, high-quality die cast aluminum. Each fixture is powder coated for maximized protection. Perfect to withstand years of condensation and pollution caused by moisture, chemicals, ultra-violet light and harsh weather conditions.


VILLA

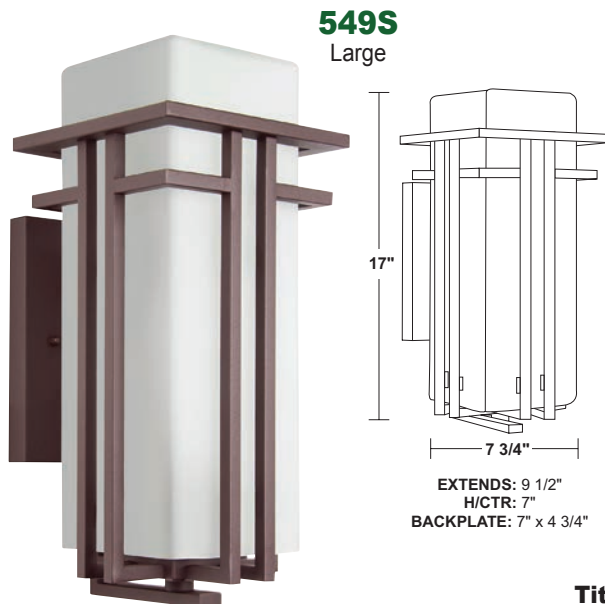

549S
Large

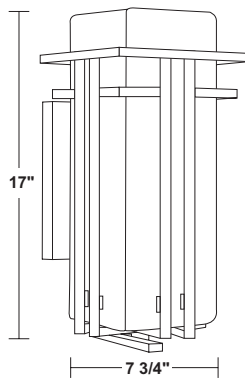

EXTENDS: 9 1/2"
H/CTR: 7"
BACKPLATE: 7" x 4 3/4"

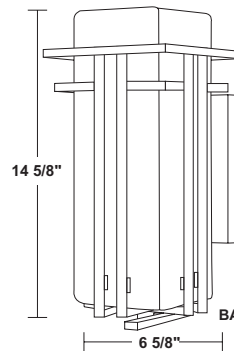

549V
Small

EXTENDS: 8 1/4"
H/CTR: 7"
BACKPLATE: 7" x 4 3/4"



GUIDE: 549SF-BZ

ITEM #	LENS	LIGHT SOURCE	COLOR
549S	GLASS	INCANDESCENT	BZ-Bronze
549V	F-Frosted	(1) 75W MAX Medium Base	
LED LIGHT SOURCE			
		E26 MEDIUM BASE LED	CCT
		2LE26-A19 800lm ☆	C-4K
			W-3K

Title 24 Available
(call for details)


CAVALIER

GUIDE: 561FMF-BZ



ITEM #	LENS	LIGHT SOURCE	COLOR
561FM	GLASS	INCANDESCENT	BZ-Bronze
	F-Frosted	(2) 40W MAX Medium Base	
LED LIGHT SOURCE			
		E26 MEDIUM BASE LED	CCT
		2LE26-(2) A19 800lm ☆	C-4K
			W-3K

Title 24 Available
(call for details)

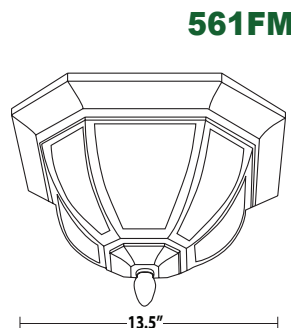

561FM



☆ **Lamp Included**
Energy Star Qualified Product

SPEC SHEETS AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

WAVE LIGHTING • PHONE 877.870.WAVE (9283)

CHAIN: 36"

11.63"

9"

544HC

544S

17 1/2"

11"

EXTENDS: 13 1/2"

H/CTR: 4"

BACKPLATE: 6 1/4" x 10 1/4"

544T

9.05"

15"



GUIDE: 549SF-BZ

ITEM #	LENS	LIGHT SOURCE	COLOR
544HC	GLASS	INCANDESCENT	BZ-Bronze
544S	F-Frosted	(1) 75W MAX Medium Base	
544T		LED LIGHT SOURCE	
544V		E26 MEDIUM BASE LED	
		LE26-A19 800lm ☆	CCT
			C-4K
			W-3K

Title 24 Available
(call for details)

*Energy Star not available on Post Top Fixtures.

14 3/4"

9"

EXTENDS: 11 1/2"

H/CTR: 4"


BACKPLATE: 6 1/4" x 10 1/4"

544V

- WALL OR CEILING MOUNT
- INSECT & DUST PROOF
- ENCLOSED & GASKETED
- DIE CAST ALUMINUM
- HOSE DOWN
- IP65 RATED




166FM
Ring

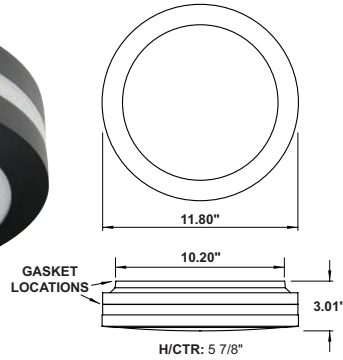

SCAN FOR VIDEO



169FM
Eyelid

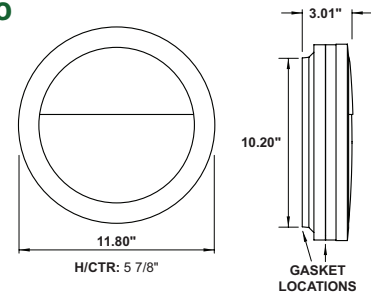

GUIDE: 166FMF-LR15C-BK


ITEM #	DIFFUSER	LIGHT SOURCE	COLOR	OPTION
166FM	POLYCARBONATE	LED LIGHT SOURCE	BK-Black	O-Occupancy Sensor
169FM	F-Frosted	120V LIGHTWAVE LED LR15-15W 1400lm LR22-23W 1900lm	WH-White C-4K W-3K	

- WALL MOUNT
- INSECT & DUST PROOF
- ENCLOSED & GASKETED
- PHOTOCELL INCLUDED
- HOSE DOWN
- IP65 RATED



GUIDE: 266FMF-LR12-BZ

ITEM #	DIFFUSER/HOUSING	LIGHT SOURCE	COLOR
266FM	POLYCARBONATE	LED LIGHT SOURCE	BZ-Bronze
	F-Frosted	120V LIGHTWAVE LED LR12-13W 1000lm	CCT C-4K

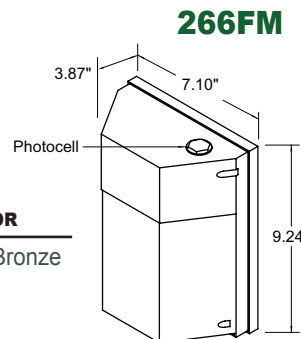


Energy Star Qualified Product

SPEC SHEETS AVAILABLE ONLINE. Specifications subject to change without notice. LED option information on page 6.

WAVE LIGHTING • PHONE 877.870.WAVE (9283)

502VF

- DOWNLIGHT
- DIE CAST ALUMINUM

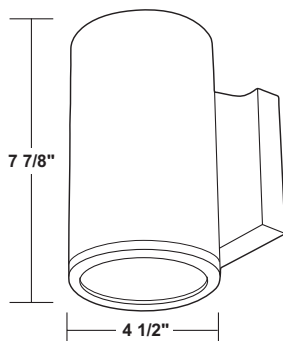

EXTENDS: 5 7/8"
H/CTR: 2 1/4"
BACKPLATE: 4 1/2" x 4 1/2"




See Page 23 for
Non-Metallic Version

GUIDE: 502VF-LR11W-BK

ITEM #	LENS	LIGHT SOURCE	COLOR
502V	GLASS F-Frosted	LED LIGHT SOURCE	
		120V LED LR11-11W, 870lm	BK-Black
		CCT C-4K W-3K	BZ-Bronze

502SF

- UP & DOWNLIGHT
- DIE CAST ALUMINUM


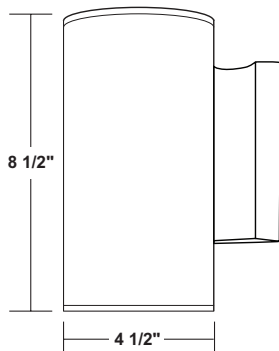


EXTENDS: 5 7/8"
H/CTR: 2 1/4"
BACKPLATE: 4 1/2" x 4 1/2"



GUIDE: 502SF-LR22W-BK

ITEM #	LENS	LIGHT SOURCE	COLOR
502S	GLASS F-Frosted	LED LIGHT SOURCE	
		120V LED LR22-22W, 1740lm	BK-Black
		CCT C-4K W-3K	BZ-Bronze

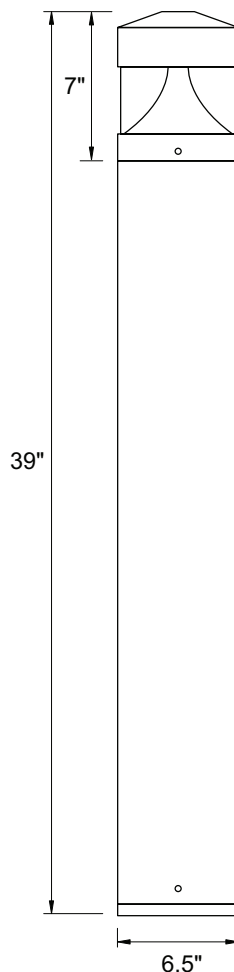

Anchor Bolt M10 x 6.7"
(3 anchor bolts and template included)



C200BC



GUIDE: C200BC-L10C-BK

ITEM #	LENS	LIGHT SOURCE	COLOR	OPTIONS
C200B	POLYCARB C-Clear	LED LIGHT SOURCE		D-0-10v Dimming
		100-277V MULTI-VOLT L10-10W, 937lm	BK-Black	
		CCT C-4K	BZ-Bronze	